

GOODRICH SOLUTIONS  
**FLOORING**  
**EZLAY**



Goodrich Global  
SINCE 1983

**LUXURY VINYL TILES - LOOSE LAY**



*We've got you  
Covered!*

**GEFFVINYL** LVT

**2021 - 2023.12**

COMMERCIAL | HOSPITALITY | RESIDENTIAL | EDUCATION

# WOOD

# STOCKING



GEL-001

LATTE OAK





GEL-002

FROSTY OAK



GEL-003

ASH OAK

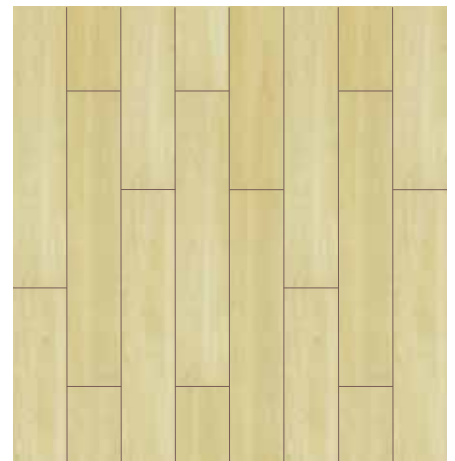

Dimensions: 1219.2mm x 228.6mm  
Packaging: 2.23m<sup>2</sup> / Ctn

# MARBLE

# STOCKING



GEL-004 GRAND MARBLE



GEL-004

GRAND MARBLE



Dimensions: 304.8mm x 609.6mm  
Packaging: 2.23m<sup>2</sup> / Ctn


# CARPET



GEL-008  
SILVER KHAKI



GEL-009  
GREY FOSSIL




Dimensions:  
457.2mm x 457.2mm  
Packaging:  
1.881m<sup>2</sup> / Ctn




GEL-008 SILVER KHAKI

# WOVEN VINYL

# STOCKING




GEL-005  
GREY KNIT

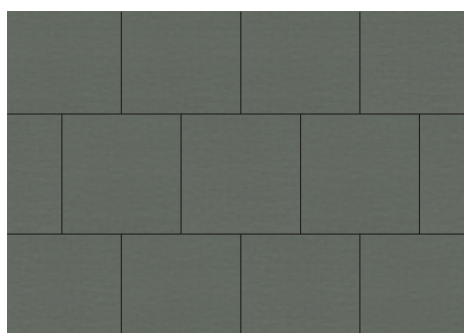

GEL-006  
COAST KNIT



GEL-007  
NEPTUNE KNIT



Dimensions:  
457.2mm x 457.2mm  
Packaging:  
1.881m<sup>2</sup> / Ctn

# Advantages



Certified  
Low VOCs




Easy  
Installation &  
Replacement




Eco-friendly



Non-slip  
Backing



Superior  
Dimensional  
Stability

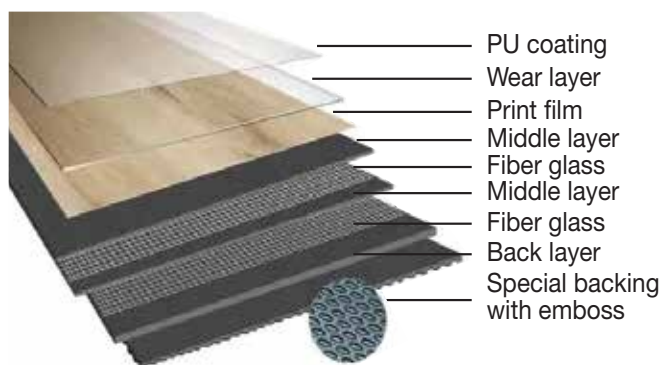

## Technical Information

Item	Standard Reference	Main Parameter
Name		Loose Lay 5.0/0.3mm
Size	EN ISO 24342	Deviation $\leq 0.15\%$ of nominal length up to 0.5mm maximum
Overall thickness	EN ISO 24346	5.0mm
Wear layer thickness	EN ISO 24340	0.3mm
Total mass per unit area	EN ISO 23997	+13%/-10%
Squareness and straightness	EN ISO 24342	Pass
Dimensional stability	EN ISO 23999	$\leq 0.25\%$
Curling after exposure to heat	EN ISO 23999	$\leq 2\text{mm}$
Usage Classification	EN ISO 10874	23,31
Abrasion resistance	EN 660-2	Group T
Slip Resistance	EN 13893	DS
	DIN 51130	$\geq R9$
Color fastness to artificial light	EN ISO 105 B02	$\geq 6$
Flexibility	EN ISO 24344	20mm
Effect of castor chair	ISO 4918	Pass
Impact Sound Reduction	ASTM E 492-09	IIC=58
Chemical resistance	EN ISO 26987	GOOD
Toxicity	EN 71	Non-toxic
Resistance to staining	EN ISO 26987	GOOD
Heavy metals	Rohs	ND
Phthalate	EN 14372	ND
Formaldehyde Emission	EN 717-1	E1
Fire Classification	EN 13501-1	Bf1-s1
Underfloor heating		Not more than 28°C
SVHC	REACH	Pass
VOC	DIBT/AgBB	Pass
	French VOC Regulation	A+
	California Specification 01350	Pass



# GOODRICH SOLUTIONS **FLOORING** **EZLAY**

## **WITH GOODRICH,**

Your habitat becomes

A gallery of

Your **self-expressions;**

A canvas for

Your **creativity;**

A space for

Your **soul;**

A showcase of


Your **taste for life;**



Stay Connected - [www.goodrichglobal.com](http://www.goodrichglobal.com) | [info@goodrichglobal.com](mailto:info@goodrichglobal.com)

 /Goodrich.Global.Singapore

 /goodrich\_global

 /GoodrichGlobal

 /GoodrichChina

 /GoodrichGlobal

 /goodrichglobal

 /GoodrichHQ

 /Goodrich\_Global

SINGAPORE [HQ] | CHINA | HONG KONG (CHINA) | INDIA | INDONESIA | MALAYSIA | MYANMAR | PHILIPPINES | THAILAND | UNITED ARAB EMIRATES | VIETNAM

Copyright © 2020 Goodrich Global. All rights reserved.