

NOVACLICK

GEFFVINYL LVT

# GOODRICH SOLUTIONS FLOORING NOVACLICK

## LUXURY VINYL TILE



Goodrich Global  
SINCE 1983



*We've got you  
Covered!*



GEFFVINYL LVT

2022.11 - 2025

COMMERCIAL | HOSPITALITY | RESIDENTIAL | EDUCATION



Goodrich Global  
SINCE 1983

# GEFF NovaClick



## Technical Specifications

### Installation Guidelines

- Prior to installation, the subfloor must be heated for -14 days if heating is available, and if not, allow sufficient time to dry out completely.
- Room temperature must be maintained at 18°C or higher before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the ground to avoid bending the floor.
- Prior to installation, please ensure that both color and lot# are as per order.
- When installing NovaClick, be sure to keep dust, dirt or foreign particles away from the locking strip.

### Maintenance

- Regularly sweep floor to remove sand and grit that can scratch the floor.
- For best result, use only water with a mop. Avoiding flooding the floor with too much water.
- For heavily soiled areas, use a neutral ph balanced floor cleaner.
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep NovaClick on flat surface to keep it from warping.

Item	Standard Reference	Main Parameter
Name		CLICK 5.0/0.55mm
Size	EN ISO 24342	Deviation ≤0.15% of nominal length up to mm maximum
Overall thickness	EN ISO 24346	5.0mm
Wear layer thickness	EN ISO 24340	0.55mm
Total mass per unit area	EN ISO 23997	13%/-10%
Squareness and straightness	EN ISO 24342	Pass
Dimensional stability after exposure to	EN ISO 23999	≤0.25%
Curling after exposure to heat	EN ISO 23999	≤2mm
Usage classification	EN ISO 10874	23,33,42
Abrasion resistance	EN 660-2	Group T
Slip resistance	EN 13893	DS
	DIN 51130	R10
Color fastness to artificial light	EN ISO 105 B02	≥6
Flexibility	EN ISO 24344	20mm
Effect of castor chair	ISO 4918	Pass
Impact sound reduction	ASTM E 492-09	IIC=58
Chemical resistance	EN ISO 26987	GOOD
Toxicity	EN71	Non-toxic
Resistance to staining	EN ISO 26987	GOOD
Heavy metals	Rohs	ND
Phthalate	EN 14372	ND
Formaldehyde emission	EN 717-1	E1
Fire classification	EN 13501-1	Bf1-s1
Underfloor heating		Not more than 28°C
Antibacterial	JISZ2801	Pass
SVHC	REACH	Pass
	DIBT/AgBB	Pass
	French VOC Regulation	A+
VOC	California Specification 01350	Pass



# GEFF NovaClick



Antibacterial (JIS Standard)



German Click System



Certified Low VOCs



Silent & Soft



Easier Maintenance




Superior Dimensional Stability  
- Fiberglass Stability Layer



Easy Installation & Replacement



Ultra Water Resistant

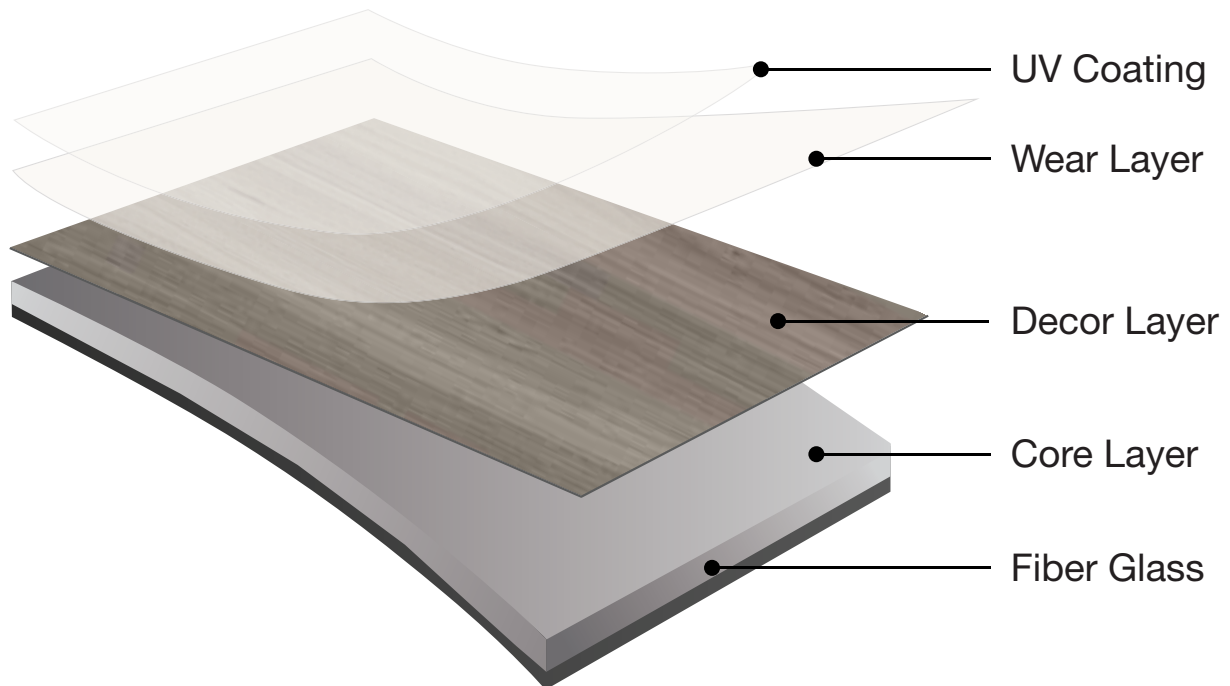



1219.2mm

177.8mm

Dimensions: 1219.2mm x 177.8mm  
Packaging: 2.168 m<sup>2</sup> / box

GNV-002 Silver Oak



GNV-001

Ivory Oak



GNV-002

Silver Oak



GNV-003

Ash Oak



GNV-004

American Chestnut




GNV-005

Vintage Oak



GNV-006

Artisan Parquet



1219.2mm

177.8mm

Dimensions: 1219.2mm x 177.8mm  
Packaging: 2.168 m<sup>2</sup> / box

GNV-004 American Chestnut



GNV-007

French Maple



GNV-008

Premier Oak



GNV-009

Parish Oak



GNV-010

Weathered Timberland



GNV-011

European Oak



GNV-012

Classic Walnut



GNV-013

Pewter Oak



1219.2mm

177.8mm

Dimensions: 1219.2mm x 177.8mm  
Packaging: 2.168 m<sup>2</sup> / box

GNV-013 Pewter Oak

# GOODRICH SOLUTIONS **FLOORING** **NOVACLICK**

## **WITH** **GOODRICH,**

Your habitat becomes

A gallery of  
Your **self-expressions;**


A canvas for  
Your **creativity;**


A space for  
Your **soul;**

A showcase of  
Your **taste for life;**

Stay Connected - [www.goodrichglobal.com](http://www.goodrichglobal.com) | [info@goodrichglobal.com](mailto:info@goodrichglobal.com)

 /Goodrich.Global.Singapore

 /goodrich\_global

 /GoodrichGlobal

 /goodrichglobal

 /GoodrichGlobal

 /goodrichglobal

 /GoodrichGlobalOfficial

SINGAPORE [HQ] | MALAYSIA | THAILAND | VIETNAM | MYANMAR | INDIA | INDONESIA | UNITED ARAB EMIRATES | PHILIPPINES | CHINA | HONG KONG (CHINA)

Copyright © 2022 Goodrich Global. All rights reserved.